



ALTERNATION OF APPEARANCE, IVR-107

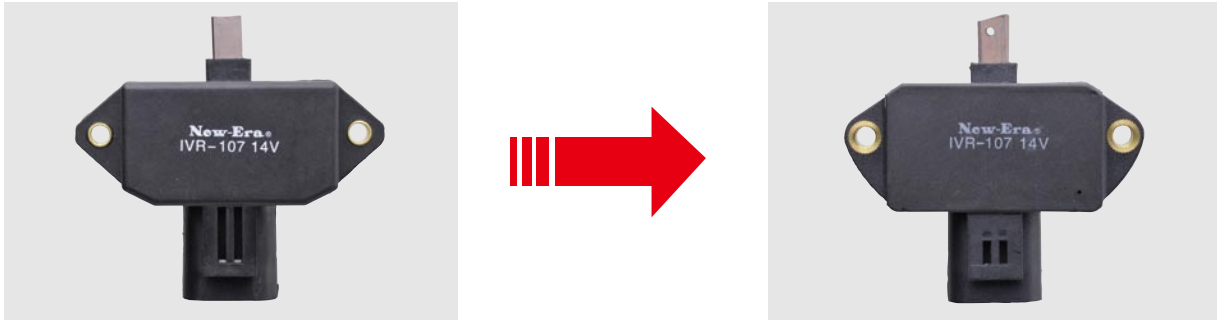

DIFFERENT POINTS

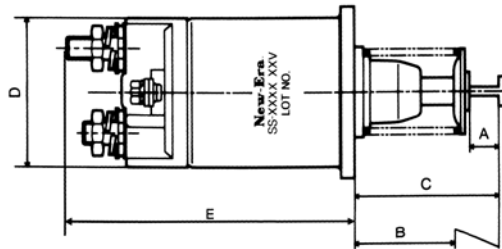

New-Era No. Rated Voltage	Hook length (A) (mm)	Plunger- Magnet pull (B) (mm)	Plunger- Not operated (C) (mm)	Outside diameter (D) (mm)	Body length (E) (mm)	Power of Out-put on motor	Terminal	Installing hole	NEWS NO.
SS-1687 12V	6.8	11.0	24.0	48.2	85.0	12V 1.6KW			357
SS-1688 12V	6.8	11.0	24.0	48.2	85.0	12V 1.7KW			370
SS-1534 24V	10.0	20.8	33.0	55.2	119.8	24V 3.2KW			363
SS-1535 12V	9.1	7.7	16.0	51.0	92.0	12V 2.2KW			374
SS-1547 24V	13.2	21.9	40.1	55.2	135.3	24V 5.0KW			360
SS-1548 24V	13.2	21.9	40.1	55.2	135.3	24V 3.7KW			361
SS-1549 24V	13.2	21.9	40.1	55.2	138.7	24V 5.5KW			361
SS-2729 24V	13.0	44.9	60.5	54.4	132.0	24V 4.5KW			368